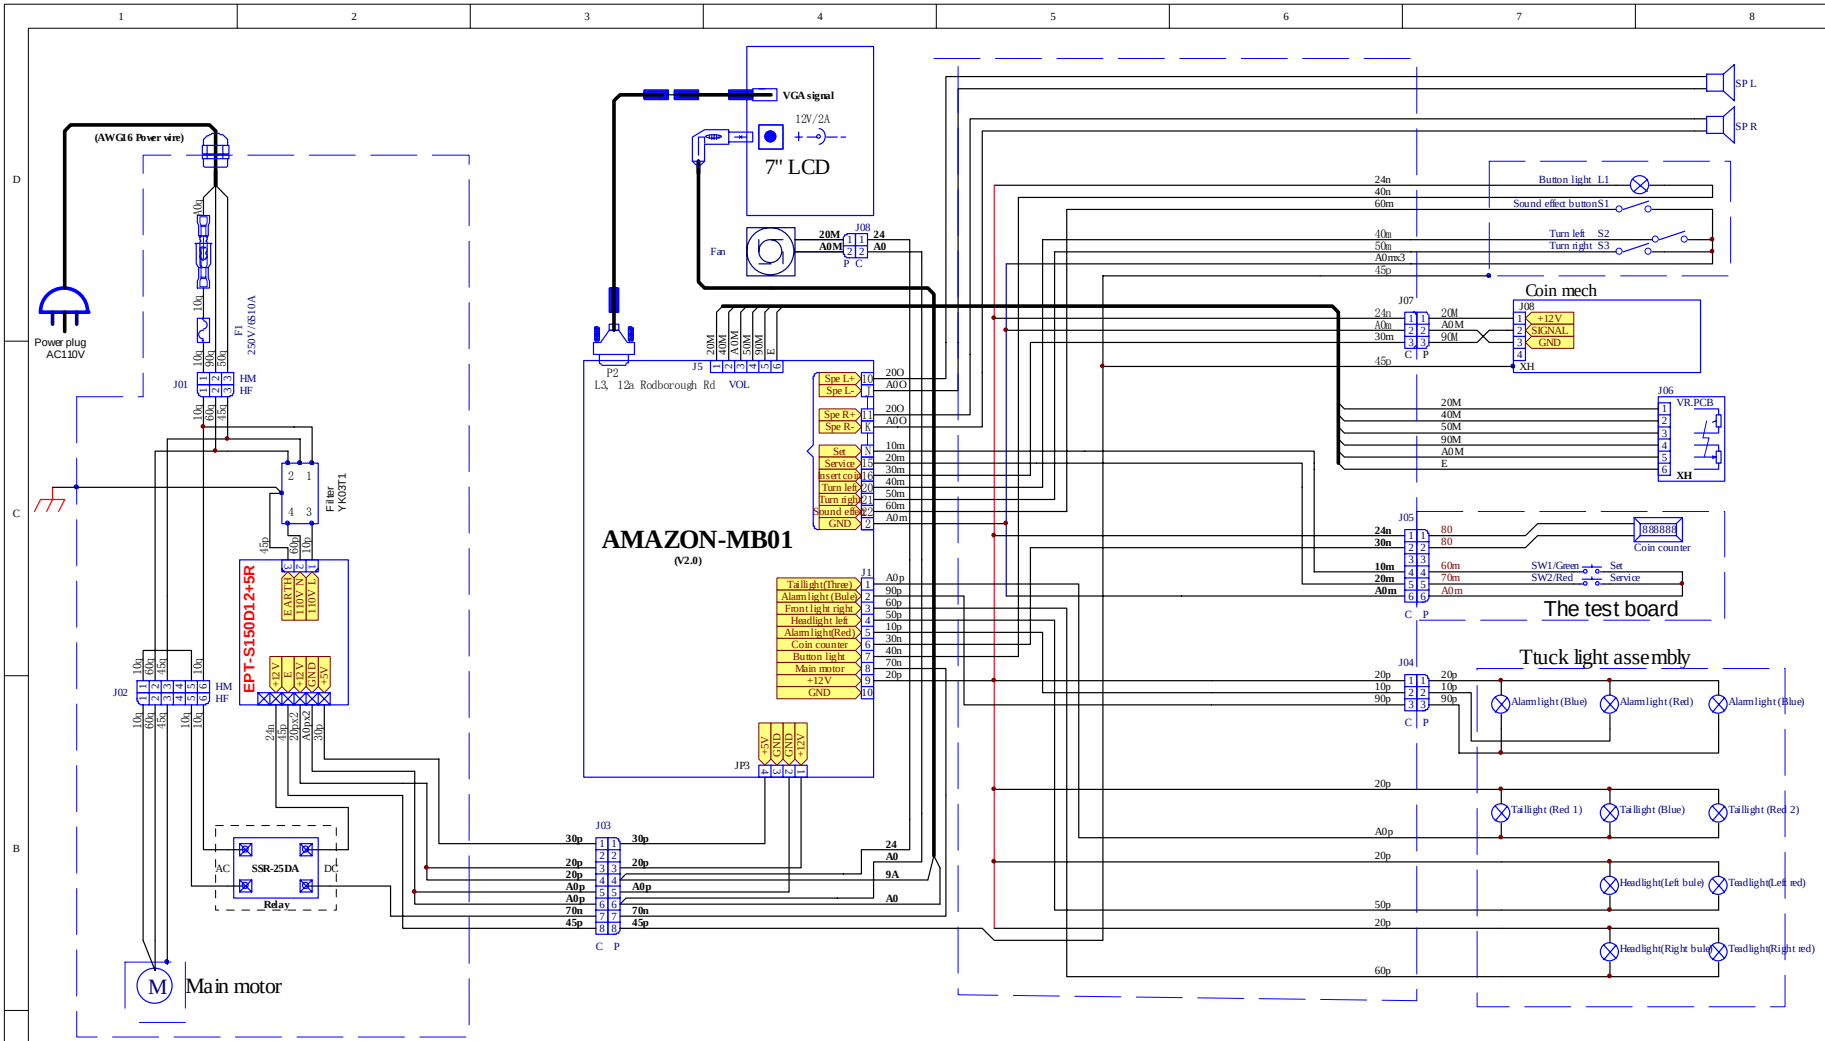

Notice: The color and the type of the wire use the following expression. For example: 20M
Wire Color: 20 is Single Red
Wire Type: M is AWG24 UL1007

9	White	I		R	AWG14 UL1005	Unit	mm	
8	Gray	H		Q	AWG16 UL1005			
7	Violet	G		P	AWG18 UL1007	Proportion	:	
6	Blue	F		O	AWG20 UL1007			
5	Green	E	Shielding layer	N	AWG22 UL1007	4001~5000	±50	
4	Yellow	D	Light Blue	M	AWG24 UL1007	3001~4000	±40	
3	Orange	C	Light Green	L	AWG26 UL1007	2001~3000	±30	
2	Red	B	Pink	K	AWG28 UL1007	1001~2000	±20	
1	Brown	A	Black	J	AWG30 UL1007	0~1000	±10	
Wire Color				**Wire Type**		**Tolerance**		

Note:
1.The connector marked with 'C, P'is MOLEX-5557，5559series, 'C' is 5559，'P' is 5557.
2.Connector marked with 'HR,HP' is JinHonDa-5084 series, 'HR' is 5084HR, 'HP' is 5084HP.

UNIS	Designer	Technics	Name: 《Mini fire truck》 Wiring diagram
	drawing	Standardization	Chart A3 Drawing MNXFC-PX-00
	Collate		Date
	Check	Approve	Path: